


Roboze ARGO 350

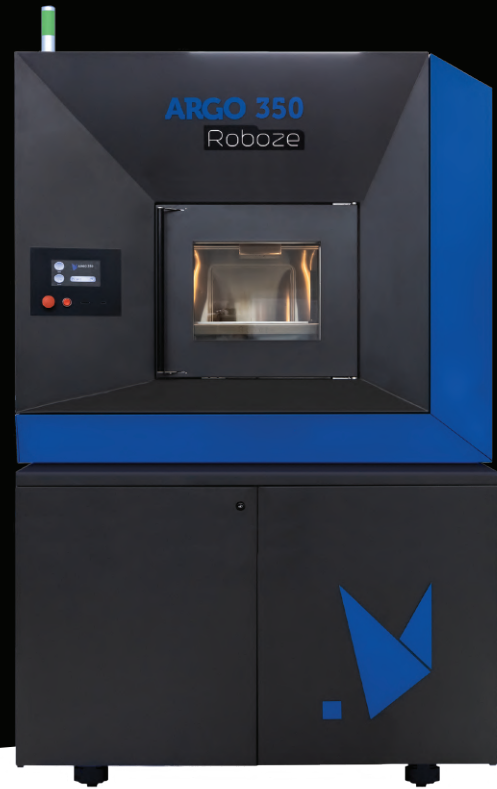

DIMENSIONS

External	(X) 1130 x (Y) 1150 x (Z) 2000 mm / 44.5x45.3x78.7 in
Build Volume	(X) 350 x (Y) 300 x (Z) 300 mm / 13.8 x 11.8 x 11.8 in
Shipping Box	(X) 1460 x (Y) 1450 x (Z) 2100 mm / 57.5x57.5x82.7 in
Machine Weight	1200 kg / 2650 lb

ACCURACY

XY: 10 µm/393.70 µin	Z: 25 µm/984.25 µin
----------------------	---------------------

RESOLUTION

Quality Profile: 0.225 mm/0.009 in	Speed Profile: 0.300 mm/0.012 in
------------------------------------	----------------------------------

PRINTING SPEED

5000 mm/min - 197 in/min

ELECTRONICS

Stepper Motors with High Resolution Encoders

Adaptive micro-stepping Drivers

7" Display touch screen

Power Absorbed: 9 kW Machine max + 1 kW per Dryer

Current consumption: 16 A max

Heating resistances: 3 kW

Dryers: up to 2 x 1 kW

Temperature sensors in the extruder and heated chamber

Heated chamber up to 180 °C/356 °F

Electrical Supply:

- Europe: 14 kVA / 400 V AC / 50 Hz

- America: 14kVA / 400 V AC / 60 Hz

Connector: IEC 60309, 32 A (3P+N+PE / 6H)*

**The American connectors are provided as needed, according to specific conditions*

MATERIALS

PEEK	FUNCTIONAL-NYLON	ULTRA-PLA
CARBON PEEK	STRONG-ABS	
ULTEM™AM9085F	PP	
CARBON PA	PC-LEXAN™ AMHI240F	
FLEX-TPU	ABS-ESD	

EXTRUDER MECHANICS

High thermal efficiency extrusion block

Extrusion temperature up to 450 °C/842 °F

Tip2-B - 0,4 mm and 0,6 mm / 0.016 in and 0.24 in

Tip2-HA - 0,4 mm and 0,6 mm / 0.016 in and 0.24 in

Tip3-HSA - 0,4 mm and 0,6 mm / 0.016 in and 0.24 in (HVP)

Compressed air cooling system

Automatic filament loading

GENERAL MECHANICS

High performance structure made of aluminium bars and steel cover

System with precision balls linear bars in ground steel

Mechatronic movement of X and Y axes with C5 hardened helical rack and pinion

Z movement with a system of precise C6 ball screw

Mobile components and aluminum supports from CNC mechanical precision machining

Vacuum system for the adhesion of the polymeric films

Build plate auto-leveling

Door lock security system

HT Dryer integrated with temperatures up to 120 °C/248 °F with autoloading of the filament (up to 2 HT Dryers predisposition)

Controlled chamber with forced ventilation

Auxiliary pneumatic system

CONTENT

USB flash drive	Screwdriver
Thickness gauge	Blister of Multi-Purpose Grease
Safety goggles	Blister of HT Grease
Safety gloves	Buildplate seal
Metallic spatula	Nozzle brush
3,0 mm (1/8") key wrench	Panels keys
Nipper	N. 2 caps for teflon tube (Tip2)

SLICING SOFTWARE

Simplify3D

COMMUNICATIONS

USB output type B

WiFi & Ethernet connection

EMEA HEADQUARTER

Roboze SPA

Via Vincenzo Aulisio 31/33 70124 Bari - Italy

USA HEADQUARTER

Roboze INC

7934 Breen Drive, Houston Texas 77064, United States